



## Globe mini COB 3000

### Technical specification

Pendant light with incorporated electronic gear for LED lamps. High quality reflector with different beam spreads.

**Model and colors** Available in aluminium or black shade with gold reflector.

**Area of use** Pendant light for indoor applications.

### Technical data

Mains (input) voltage	220-240 V
Total weight	2,8 kg
Form of protection	IP 20, class I
Light source	LED
Operating position	Vertical
Start time	Instant
Driver	Built in
Optics	Opaque diffuser/Optic lense
Beam spreads	Spot, Medium, Flood

Art no	Description	Color
304-540-20	Spot	Aluminium
304-541-20	Medium	Aluminium
304-542-20	Flood	Aluminium


Spot		Medium		Flood	
16°		25°		34°	
m	ø	m	ø	m	ø
1.0	0.28	1.0	0.44	1.0	0.62
2.0	0.56	2.0	0.88	2.0	1.24
3.0	0.83	3.0	1.32	3.0	1.86

Type	Delivered lumen output (lm)	System power (W)	EEI <sup>3</sup>
930 Spot	3100	40	A
930 Medium	3000	34	A
930 Flood	3000	34	A

### Note

The above article numbers applies to 930.

Product available with DALI option on request. Final shipping destination may require minor modifications of components as well as article numbers, be sure to state the country in which the fixtures will be used. Special versions can also be produced depending on quantity.

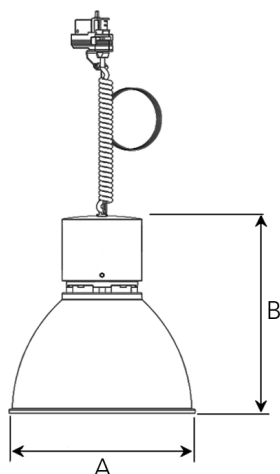

A 304 B 326 (mm)