



Pendix 3000

Technical specification

Pendant for LED lamps. High quality cylindrical reflectors with four different beam spreads. Housing of aluminium.

Model and colors Available in white, black or grey. Cable length 4m.


Area of use Pendant for wire or ceiling mount.

Technical data

Mains (input) voltage	220-240 V
Total weight	2,5 kg
Form of protection	IP 20, class I
Light source	LED
Operating position	Vertical
Driver	Built in
Optics	Metalized aluminum reflector
Beam spreads	Spot, Medium, Flood, Wide flood

Spot		Medium		Flood		Wide Flood	
14°		26°		37°		55°	
m	ø	m	ø	m	ø	m	ø
1.0	0.24	1.0	0.47	1.0	0.68	1.0	1.05
2.0	0.48	2.0	0.94	2.0	1.35	2.0	2.10
3.0	0.72	3.0	1.41	3.0	2.03	3.0	3.15

Art no	Description	Color
290-510-10	Spot	White
290-510-20	Spot	Black
290-510-30	Spot	Grey
290-511-10	Medium	White
290-511-20	Medium	Black
290-511-30	Medium	Grey
290-512-10	Flood	White
290-512-20	Flood	Black
290-512-30	Flood	Grey
290-513-10	Wide flood	White
290-513-20	Wide flood	Black
290-513-30	Wide flood	Grey

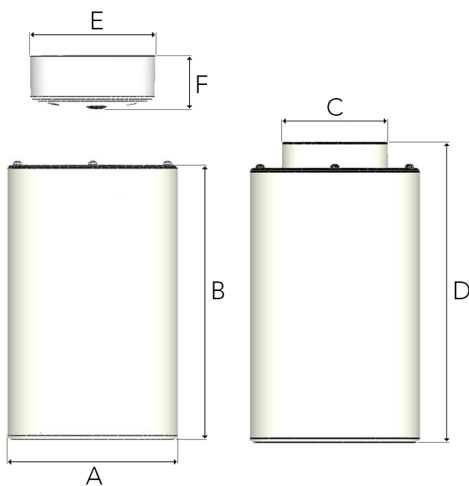

A 159 B 256 C 99 D 281 E 117 (mm)

Type	Delivered lumen output (lm)	System power (W)	EEI ³
930	2760	22,8	A++
940	2800	24,5	A++
840	2900	22	A++

Note

The above article numbers applies to 930.

Product available with FOOD COB on request. Final shipping destination may require minor modifications of components as well as catalogue numbers, be sure to state the country in which the fixtures will be used.