



Globe COB 3000

Technical specification

Pendant with incorporated electronic gear for LED lamps. High quality lenses with different beam spreads.


Model and colors Lampshade available in brushed aluminium. Mounting for monopoint or track. Cable always in black. Extendable cable 6m.

Area of use Pendant for indoor applications.

Technical data

Mains (input) voltage	220-240 V
Total weight	4,43 kg
Form of protection	IP 20, class I
Light source	LED
Operating position	Vertical
Start time	Instant
Driver	Built in
Optics	Transparent Polycarbonate
Beam spreads	Spot, Medium, Flood

Spot		Medium		Flood	
17°		23°		38°	
m	ø	m	ø	m	ø
1.0	0.30	1.0	0.41	1.0	0.70
2.0	0.60	2.0	0.83	2.0	1.39
3.0	0.91	3.0	1.24	3.0	2.09

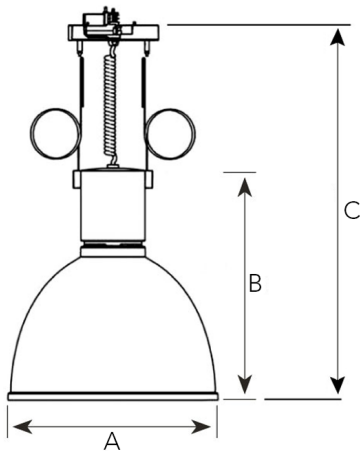

A 424 B 480 C 600 (mm)

Art no	Description	Color
221-530-20	Globe COB, Spot	Black
221-530-32	Globe COB, Spot	Dark Grey
221-531-20	Globe COB, Medium	Black
221-531-32	Globe COB, Medium	Dark Grey
221-532-20	Globe COB, Flood	Black
221-532-32	Globe COB, Flood	Dark Grey
054-70-10	Monopoint with Bracket	White
054-70-20	Monopoint with Bracket	Black
054-70-30	Monopoint with Bracket	Grey
054-71-10	Track bracket	White
054-71-20	Track bracket	Black

Type	Delivered lumen output (lm)	System power (W)	EEI ³
930	2700	25	A+
940	2700	25	A+
840	2800	23	A++

Note

The above article numbers applies to 930.

Product available with DALI option on request. Final shipping destination may require minor modifications of components as well as article numbers, be sure to state the country in which the fixtures will be used. Special versions can also be produced depending on quantity. North American versions also available.



Globe COB 4000

Technical specification

Pendant with incorporated electronic gear for LED lamps. High quality lenses with different beam spreads.


Model and colors Lampshade available in brushed aluminium. Mounting for monopoint or track. Cable always in black. Extendable cable 6m.

Area of use Pendant for indoor applications.

Technical data

Mains (input) voltage	220-240 V
Total weight	4,43 kg
Form of protection	IP 20, class I
Light source	LED
Operating position	Vertical
Start time	Instant
Driver	Built in
Optics	Transparent Polycarbonate
Beam spreads	Spot, Medium, Flood

Spot		Medium		Flood	
17°		23°		38°	
m	ø	m	ø	m	ø
1.0	0.30	1.0	0.41	1.0	0.70
2.0	0.60	2.0	0.83	2.0	1.39
3.0	0.91	3.0	1.24	3.0	2.09

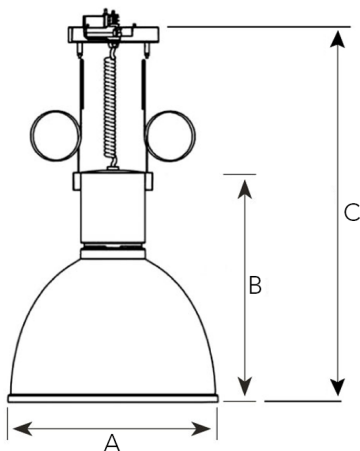

A 424 B 480 C 600 (mm)

Art no	Description	Color
221-540-20	Globe COB, Spot	Black
221-540-32	Globe COB, Spot	Dark Grey
221-541-20	Globe COB, Medium	Black
221-541-32	Globe COB, Medium	Dark Grey
221-542-20	Globe COB, Flood	Black
221-542-32	Globe COB, Flood	Dark Grey
054-70-10	Monopoint with Bracket	White
054-70-20	Monopoint with Bracket	Black
054-70-30	Monopoint with Bracket	Grey
054-71-10	Track bracket	White
054-71-20	Track bracket	Black

Type	Delivered lumen output (lm)	System power (W)	EEI ³
930	3750	36	A+
940	3750	36	A+
840	3750	31	A++

Note

The above article numbers applies to 930.

Product available with DALI option on request. Final shipping destination may require minor modifications of components as well as article numbers, be sure to state the country in which the fixtures will be used. Special versions can also be produced depending on quantity. North American versions also available.



Globe Maxi COB 3000

Technical specification

Pendant with incorporated electronic gear for LED lamps. High quality lenses with different beam spreads.

Model and colors Lampshade available in black. Mounting for monopoint or track. Cable always in black. Extendable cable 6m.

Area of use Pendant for indoor applications.

Technical data

Mains (input) voltage	220-240 V
Total weight	9 kg
Form of protection	IP 20, class I
Light source	LED
Operating position	Vertical
Start time	Instant
Driver	Built in
Optics	Transparent Polycarbonate
Beam spreads	Spot, Medium, Flood

Spot		Medium		Flood	
	17°		23°		38°
m	ø	m	ø	m	ø
1.0	0.30	1.0	0.41	1.0	0.70
2.0	0.60	2.0	0.83	2.0	1.39
3.0	0.91	3.0	1.24	3.0	2.09




Art no	Description	Color
221-558-20	Globe Maxi COB, Spot	Black
221-559-20	Globe Maxi COB, Medium	Black
221-552-20	Globe Maxi COB, Flood	Black
054-70-10	Monopoint with Bracket	White
054-70-20	Monopoint with Bracket	Black
054-70-30	Monopoint with Bracket	Grey

Type	Delivered lumen output (lm)	System power (W)	EEI ³
930	2700	25	A+
940	2700	25	A+
840	2800	23	A++

Note

The above article numbers applies to 930.

Product available with DALI option on request. Final shipping destination may require minor modifications of components as well as article numbers, be sure to state the country in which the fixtures will be used. Special versions can also be produced depending on quantity.

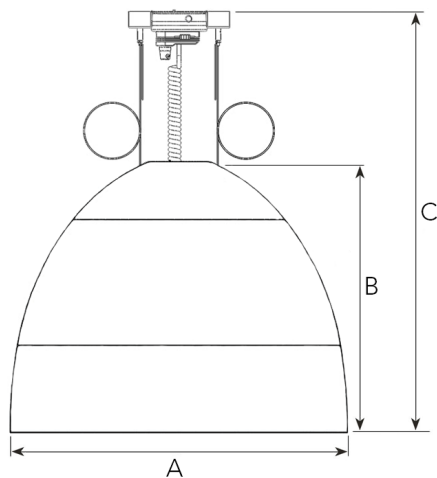

A 600 B 483 C 600 (mm)



Globe Maxi COB 4000

Technical specification

Pendant with incorporated electronic gear for LED lamps. High quality lenses with different beam spreads.

Model and colors Lampshade available in black. Mounting for monopoint or track. Cable always in black. Extendable cable 6m.

Area of use Pendant for indoor applications.

Technical data

Mains (input) voltage	220-240 V
Total weight	9 kg
Form of protection	IP 20, class I
Light source	LED
Operating position	Vertical
Start time	Instant
Driver	Built in
Optics	Transparent Polycarbonate
Beam spreads	Spot, Medium, Flood

Spot		Medium		Flood	
17°		23°		38°	
m	ø	m	ø	m	ø
1.0	0.30	1.0	0.41	1.0	0.70
2.0	0.60	2.0	0.83	2.0	1.39
3.0	0.91	3.0	1.24	3.0	2.09




Art no	Description	Color
221-560-20	Globe Maxi COB, Spot	Black
221-561-20	Globe Maxi COB, Medium	Black
221-562-20	Globe Maxi COB, Flood	Black
054-70-10	Monopoint with Bracket	White
054-70-20	Monopoint with Bracket	Black
054-70-30	Monopoint with Bracket	Grey

Type	Delivered lumen output (lm)	System power (W)	EEI ³
930	3750	36	A+
940	3750	36	A+
840	3750	31	A++

Note

The above article numbers applies to 930.

Product available with DALI option on request. Final shipping destination may require minor modifications of components as well as article numbers, be sure to state the country in which the fixtures will be used. Special versions can also be produced depending on quantity.

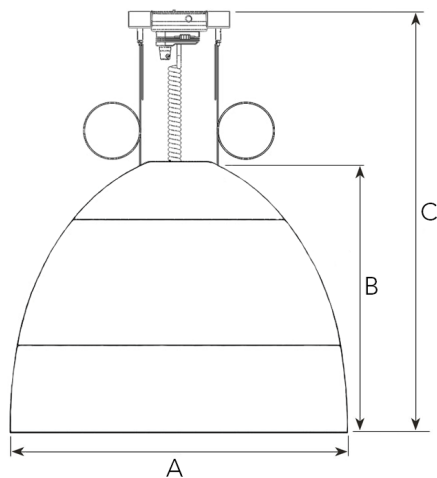

A 600 B 483 C 600 (mm)



Globe mini COB 3000

Technical specification

Pendant light with incorporated electronic gear for LED lamps. High quality reflector with different beam spreads.

Model and colors Available in aluminium or black shade with gold reflector.

Area of use Pendant light for indoor applications.

Technical data

Mains (input) voltage	220-240 V
Total weight	2,8 kg
Form of protection	IP 20, class I
Light source	LED
Operating position	Vertical
Start time	Instant
Driver	Built in
Optics	Opaque diffuser/Optic lense
Beam spreads	Spot, Medium, Flood

Art no	Description	Color
304-540-20	Spot	Aluminium
304-541-20	Medium	Aluminium
304-542-20	Flood	Aluminium


Spot		Medium		Flood	
16°		25°		34°	
m	ø	m	ø	m	ø
1.0	0.28	1.0	0.44	1.0	0.62
2.0	0.56	2.0	0.88	2.0	1.24
3.0	0.83	3.0	1.32	3.0	1.86

Type	Delivered lumen output (lm)	System power (W)	EEI ³
930 Spot	3100	40	A
930 Medium	3000	34	A
930 Flood	3000	34	A

Note

The above article numbers applies to 930.

Product available with DALI option on request. Final shipping destination may require minor modifications of components as well as article numbers, be sure to state the country in which the fixtures will be used. Special versions can also be produced depending on quantity.

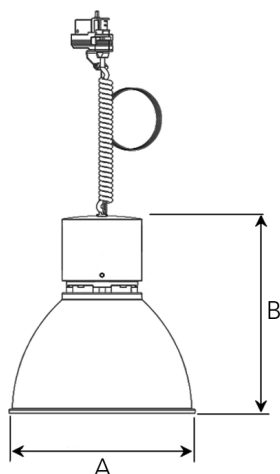

A 304 B 326 (mm)



Globe mini COB 3000 Gold

Technical specification

Pendant light with incorporated electronic gear for LED lamps. High quality reflector with different beam spreads.

Model and colors Available in black shade with gold reflector or aluminium.

Area of use Pendant light for indoor applications.

Technical data

Mains (input) voltage	220-240 V
Total weight	2,8 kg
Form of protection	IP 20, class I
Light source	LED
Operating position	Vertical
Start time	Instant
Driver	Built in
Optics	Opaque diffuser/Optic lens
Beam spreads	Spot, Medium, Flood

Art no	Description	Color
304-520-20	Spot	Black / Gold
304-531-20	Medium	Black / Gold
304-532-20	Flood	Black / Gold


Spot		Medium		Flood	
16°		25°		34°	
m	ø	m	ø	m	ø
1.0	0.28	1.0	0.44	1.0	0.62
2.0	0.56	2.0	0.88	2.0	1.24
3.0	0.83	3.0	1.32	3.0	1.86

Type	Delivered lumen output (lm)	System power (W)	EEI ³
930 Spot	3100	40	A
930 Medium	3000	34	A
930 Flood	3000	34	A

Note

The above article numbers applies to 930.

Product available with DALI option on request. Final shipping destination may require minor modifications of components as well as article numbers, be sure to state the country in which the fixtures will be used. Special versions can also be produced depending on quantity.

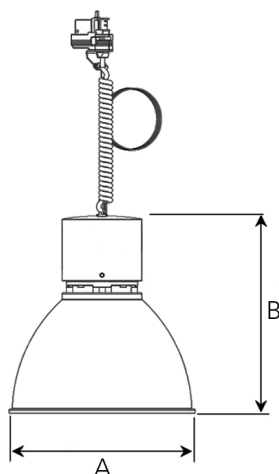

A 304 B 326 (mm)



Pendix 3000

Technical specification

Pendant for LED lamps. High quality cylindrical reflectors with four different beam spreads. Housing of aluminium.

Model and colors Available in white, black or grey. Cable length 4m.


Area of use Pendant for wire or ceiling mount.

Technical data

Mains (input) voltage	220-240 V
Total weight	2,5 kg
Form of protection	IP 20, class I
Light source	LED
Operating position	Vertical
Driver	Built in
Optics	Metalized aluminum reflector
Beam spreads	Spot, Medium, Flood, Wide flood

Spot		Medium		Flood		Wide Flood	
14°		26°		37°		55°	
m	ø	m	ø	m	ø	m	ø
1.0	0.24	1.0	0.47	1.0	0.68	1.0	1.05
2.0	0.48	2.0	0.94	2.0	1.35	2.0	2.10
3.0	0.72	3.0	1.41	3.0	2.03	3.0	3.15

Art no	Description	Color
290-510-10	Spot	White
290-510-20	Spot	Black
290-510-30	Spot	Grey
290-511-10	Medium	White
290-511-20	Medium	Black
290-511-30	Medium	Grey
290-512-10	Flood	White
290-512-20	Flood	Black
290-512-30	Flood	Grey
290-513-10	Wide flood	White
290-513-20	Wide flood	Black
290-513-30	Wide flood	Grey

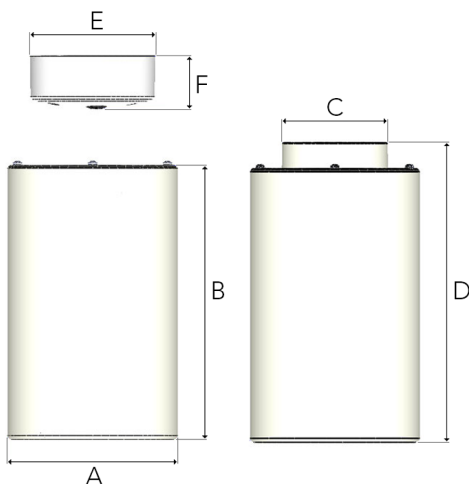

A 159 B 256 C 99 D 281 E 117 (mm)

Type	Delivered lumen output (lm)	System power (W)	EEI ³
930	2760	22,8	A++
940	2800	24,5	A++
840	2900	22	A++

Note

The above article numbers applies to 930.

Product available with FOOD COB on request. Final shipping destination may require minor modifications of components as well as catalogue numbers, be sure to state the country in which the fixtures will be used.



Pendix 4000

Technical specification

Pendant for LED lamps. High quality cylindrical reflector with four different beam spreads. Housing of aluminium.

Model and colors Available in white, black or grey. Cable length 4m.


Area of use Pendant for wire or ceiling mount.

Technical data

Mains (input) voltage	220-240 V
Total weight	2,5 kg
Form of protection	IP 20, class I
Light source	LED
Operating position	Vertical
Driver	Built in
Optics	Metalized aluminum reflector
Beam spreads	Spot, Medium, Flood, Wide flood

Art no	Description	Color
290-530-10	Spot	White
290-530-20	Spot	Black
290-530-30	Spot	Grey
290-531-10	Medium	White
290-531-20	Medium	Black
290-531-30	Medium	Grey
290-532-10	Flood	White
290-532-20	Flood	Black
290-532-30	Flood	Grey
290-533-10	Wide flood	White
290-533-20	Wide flood	Black
290-533-30	Wide flood	Grey

Spot		Medium		Flood		Wide Flood	
14°		26°		37°		55°	
m	ø	m	ø	m	ø	m	ø
1.0	0.24	1.0	0.47	1.0	0.68	1.0	1.05
2.0	0.48	2.0	0.94	2.0	1.35	2.0	2.10
3.0	0.72	3.0	1.41	3.0	2.03	3.0	3.15

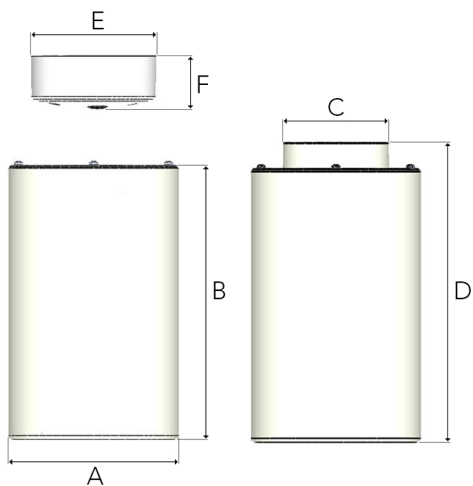

A 159 B 256 C 99 D 281 E 117 (mm)

Type	Delivered lumen output (lm)	System power (W)	EEI ³
930	3900	35	A++
940	3800	36	A+
840	3880	30	A++

Note

The above article numbers applies to 930.

Product available with FOOD COB on request. Final shipping destination may require minor modifications of components as well as catalogue numbers, be sure to state the country in which the fixtures will be used.