



GRID OPAL FC M2000 (Functional Ceiling)

Technical specification

Linear luminaire for Functional ceiling system c/c 2000mm.

Housing made of powder painted steel.

Built-in LED driver.

Opal diffuser for wide and even light distribution.

Connecting cable included with EU plug, type Schuko(CEE 7/7) as standard.



Optional power plugs can be supplied upon request.

Model and colors White as standard. Other colors on request.

Area of use Ambient lighting for indoor applications

Technical data

Mains (input) voltage	220-240 V
Driver output	Constant current
Total weight	3,25 kg
Form of protection	IP 20, class I
Color temperature	3000 or 4000 K
Operating position	Horizontal
Start time	Instant
Driver	Built in
Optics	Opaque diffuser
Beam spreads	Wide Flood
Flicker percentage	<1%
Design lifetime	50 000h

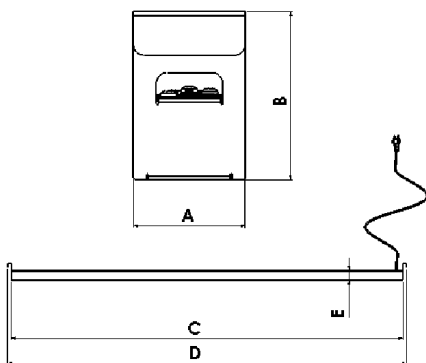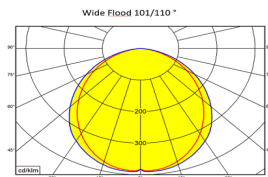

A 54 B 81 C 1894 D 1928 E 45 (mm)

Art no	Description	Color
365-510-10	Grid Opal M2000 FC 4000lm 830	White
365-511-10	Grid Opal M2000 FC 5000lm 830	White
365-512-10	Grid Opal M2000 FC 6000lm 830	White
365-513-10	Grid Opal M2000 FC 7000lm 830	White
365-514-10	Grid Opal M2000 FC 8000lm 830	White
365-515-10	Grid Opal M2000 FC 9000lm 830	White
365-610-10	Grid Opal M2000 FC 4000lm 830 DALI	White
365-611-10	Grid Opal M2000 FC 5000lm 830 DALI	White
365-612-10	Grid Opal M2000 FC 6000lm 830 DALI	White
365-613-10	Grid Opal M2000 FC 7000lm 830 DALI	White
365-614-10	Grid Opal M2000 FC 8000lm 830 DALI	White
365-615-10	Grid Opal M2000 FC 9000lm 830 DALI	White

Type	Delivered lumen output (lm)	System power (W)	EEI ³
830	4000	28	A++
830	5000	35	A++
830	6000	43	A++
830	7000	51,5	A++
830	8000	62	A++
830	9000	72	A+

Note

Product available with DALI and Constant Light Output (CLO) on request.

Final shipping destination may require minor modifications of components as well as article numbers, be sure to state the country in which the fixtures will be used.