


GRID OPAL TRACK

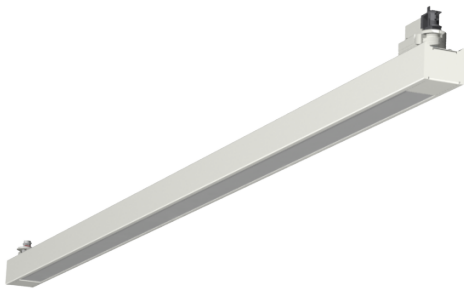

Technical specification




Linear luminaire for mounting on 3 circuit track systems.
Housing made of powder painted steel.
Built-in LED driver.
Opal diffuser for wide and even light distribution.
Equipped with 3 circuit track adapter type Nordic Light NA 9601.

Model and colors White as standard. Other colors on request.

Area of use Ambient lighting for indoor applications

Technical data

Mains (input) voltage	220-240 V
Driver output	Constant current
Total weight	2,7 kg
Form of protection	IP 20, class I
Color temperature	3000 or 4000 K
Operating position	Horizontal
Start time	Instant
Driver	Built in
Optics	Opaque diffuser
Beam spreads	Wide Flood
Flicker percentage	<1%
Design lifetime	50 000h

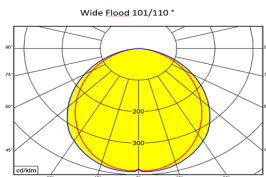

A 54 B 45 C 67 D 1636 (mm)

Art no	Description	Color
365-530-10	Grid Opal Track 4000lm 830	White
365-531-10	Grid Opal Track 5000lm 830	White
365-532-10	Grid Opal Track 6000lm 830	White
365-533-10	Grid Opal Track 7000lm 830	White
365-534-10	Grid Opal Track 8000lm 830	White
365-535-10	Grid Opal Track 9000lm 830	White
365-630-10	Grid Opal Track 4000lm 830 DALI	White
365-631-10	Grid Opal Track 5000lm 830 DALI	White
365-632-10	Grid Opal Track 6000lm 830 DALI	White
365-633-10	Grid Opal Track 7000lm 830 DALI	White
365-634-10	Grid Opal Track 8000lm 830 DALI	White
365-635-10	Grid Opal Track 9000lm 830 DALI	White

Type	Delivered lumen output (lm)	System power (W)	EEI ³
830	4000	28	A++
830	5000	36	A++
830	6000	44	A++
830	7000	52	A++
830	8000	63	A+
830	9000	74	A+

Note

Product available with DALI and Constant Light Output (CLO) on request.
Final shipping destination may require minor modifications of components as well as article numbers, be sure to state the country in which the fixtures will be used.