



## Grid 3 - Functional ceiling, M1800

### Technical specification

Linear down light for LED tubes. Reflector with flood beam spread. Housing of powder painted extruded aluminium. Separate driver.


**Model and colors** Available in white.

**Area of use** LED light for indoor functional ceiling. Suitable for general lighting.

### Technical data

Mains (input) voltage	230 V
Total weight	2 kg
Form of protection	IP 20, class III
Light source	LED
Operating position	Horizontal
Start time	Instant
Driver	Stand alone, included
Reflector	High quality anodized reflector
Beam spreads	Flood
Design lifetime	L80 B10 50 000h

Flood	
86°/77°	
m	ø
1.0	1.88
2.0	3.76
3.0	5.63




Art no	Description	Color
319-547	4000lm, M1800	White
319-548	5000lm, M1800	White
319-549	6000lm, M1800	White
319-550	7000lm, M1800	White
319-551	8000lm, M1800	White

Type	Delivered lumen output (lm)	System power (W)	EEI <sup>3</sup>
830	4000	31,5	A++
830	5000	40	A++
830	6200	51	A++
830	7200	61	A++
830	8050	71	A++

### Note

Final shipping destination may require minor modifications of components as well as article numbers, be sure to state the country in which the fixtures will be used.

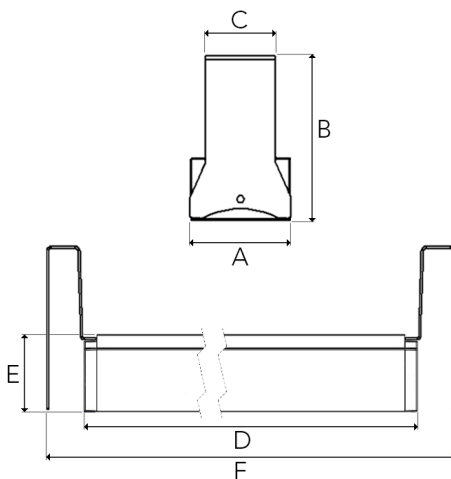

A 49 B 81 C 34 D 1634 E 37,5 (mm)