


## Grid Opal Ceiling Mount

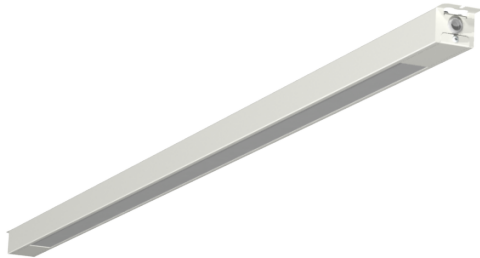

### Technical specification




Linear luminaire for ceiling mount.  
Housing made of powder painted steel.  
Built-in LED driver.  
Opal diffuser for wide and even light distribution.  
Internal trough wiring cables with terminal blocks in both ends for fixed daisy chain installation.

**Model and colors** White as standard. Other colors on request.

**Area of use** Ambient lighting for indoor applications

### Technical data

Mains (input) voltage	220-240 V
Driver output	Constant current
Total weight	2,9 kg
Form of protection	IP 20, class I
Color temperature	3000 or 4000 K
Operating position	Horizontal
Start time	Instant
Beam spreads	Wide Flood
Flicker percentage	<1%
Design lifetime	50 000h

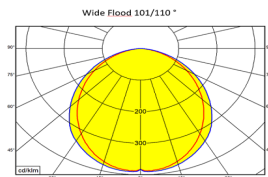

A 54 B 45 C 1744 D 1780 (mm)

### Art no

365-520-10  
365-521-10  
365-522-10  
365-523-10  
365-524-10  
365-525-10  
365-620-10  
365-621-10  
365-622-10  
365-623-10  
365-624-10  
365-625-10

### Description

Grid Opal CM 4000lm 8,0  
Grid Opal CM 5000lm 830  
Grid Opal CM 6000lm 830  
Grid Opal CM 7000lm 830  
Grid Opal CM 8000lm 830  
Grid Opal CM 9000lm 830  
Grid Opal CM 4000lm 830 DALI  
Grid Opal CM 5000lm 830 DALI  
Grid Opal CM 6000lm 830 DALI  
Grid Opal CM 7000lm 830 DALI  
Grid Opal CM 8000lm 830 DALI  
Grid Opal CM 9000lm 830 DALI

### Color

White  
White  
White  
White  
White  
White  
White  
White  
White  
White  
White  
White  
White

Type	Delivered lumen output (lm)	System power (W)	EEI <sup>3</sup>
830	4000	28	A++
830	5000	36	A++
830	6000	44	A++
830	7000	52	A++
830	8000	63	A+
830	9000	74	A+

### Note

Product available with DALI and Constant Light Output (CLO) on request.  
Final shipping destination may require minor modifications of components as well as article numbers, be sure to state the country in which the fixtures will be used.