




Spot		Medium		Flood		Wide Flood	
14°		26°		37°		55°	
m	ø	m	ø	m	ø	m	ø
1.0	0.24	1.0	0.47	1.0	0.68	1.0	1.05
2.0	0.48	2.0	0.94	2.0	1.35	2.0	2.10
3.0	0.72	3.0	1.41	3.0	2.03	3.0	3.15

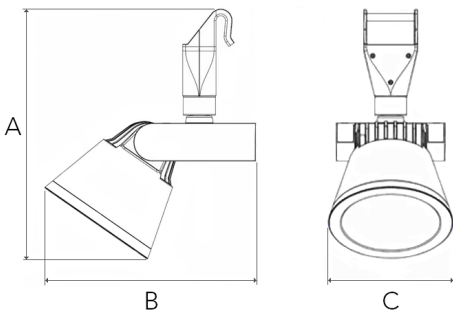

A 263 B 222 C 132 (mm)

## Ultra Hook 3000

### Technical specification

LED light fixture with incorporated electronic gear and Chip on board. High quality reflectors with four different beam spreads. Lamp housing of die-cast aluminium for optimal cooling, long lifetime and low weight.

**Model and colors** Available in white, black and grey.

**Area of use** Functional ceiling for indoor applications.

### Technical data

Mains (input) voltage	220-240 V
Total weight	1,2 kg
Form of protection	IP 20, class I
Light source	LED
Operating position	360°/90°
Start time	Instant
Driver	Built in
Optics	Metalized aluminum reflector
Beam spreads	Spot, Medium, Flood, Wide flood

Art no	Description	Color
265-575-10	Spot w/o glass, with Hook	White
265-576-10	Medium w/o glass, with Hook	White
265-577-10	Flood w/o glass, with Hook	White
265-578-10	Wide flood w/o glass, with Hook	White

Type	Delivered lumen output (lm)	System power (W)	EEI <sup>3</sup>
930	2760	22,8	A++
940	2800	24,5	A++
840	2900	22	A++

### Note

Product available with meat or bread COB on request. Product available in other Kelvin temperatures on request. Final shipping destination may require minor modifications of components as well as article numbers, be sure to state the country in which the fixtures will be used.